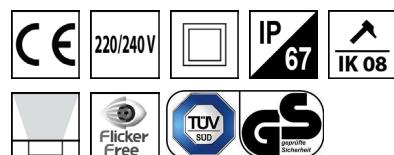


Recessed LED inground lamp

INDUCTION COUPLING
ss316

LIFE TIME AND WARRANTY

Nominal life time 50000hrs

Warranty 5 years

NORMS & DIRECTIVES

Nominal norms marking CE/TUV/GS

CE directive CEI 60598-1
CEI 60598-2-2 : 2012

Security Photobiological CEI 62471 – : 2008 : RG0

Inflammable surface compliancy F

Other marking ASTM B117

GENERAL SPECIFICATION

Product Family AL-ILL125-COB-F-6W

Voltage supply AC220-240V 50/60Hz 24VDC

Operating temperature range Ta -15/+50 °C

Maintenance & cleaning H2O; Antistatic tissu

Sources of light COB

Brand of sources CREE

Mac Adam range +/- 150K (Mac adam 3)

Life time L80B10 at 25°C 50000hrs

Life time L70B50 at Ta Max 35000hrs

Brand of Driver AC PCB-B

Cycles on/off >25000

Ripple current - Flicker free

Position driver on fixture Induction - integrated

Body material Aluminum/Stainless steel 316L

Diffuser material Tempered Glass

Réflector material -

Closing clips material -

Fixation Spring fixation

Electrical network interface Cable 1.5m H05RNF 2G 16A

Surge protection

Vandal proof -

Through wiring -

Accessories -

Remarks -

OPTIONS

Dimming NONE

CCT color temperature 3000K [3]; 5000k [5]; 6000K [6];
Blue [B];
Green [G];
Red [G]

CRI color rending index -

Color of product -

Reflector/Optic -

Mounting accessories Earth pole [LX002];
concrete bascket [LX001]

Other option -